


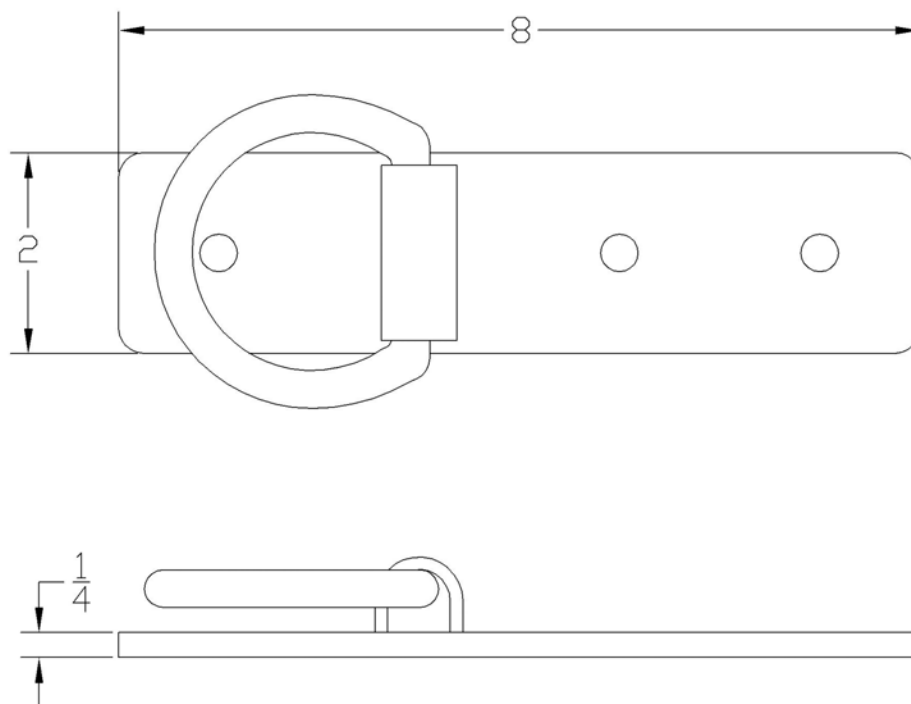

DESCRIPTION

The Single D Truss Lock anchor is designed to be temporary, reusable anchor for fall arrest. Simply screw the anchor into a rafter or truss using 3 5/16" x 3" lag bolts. Not designed for horizontal lifelines, this is a single point attachment anchor with the load intended to be applied in the long axis of the anchor.

GENERAL SPECIFICATIONS

Item	Description	Tested At
Plate	1/4" A36 Steel	N/A
D-Rings	Zinc Plated Forged Steel	5,000 lb
Capacity—1 worker, max weight 310lbs including tools and equipment		
Break Strength—Min 5,000 lbs.		
Weight—2.5 lbs		
Technical References: Meets OSHA 1926 Subpart M, ANSI Z359-2007		