


## "Roof Lock" - Single D Permanent Roof Anchor

SPECIFICATIONS PAGE 1 OF 1



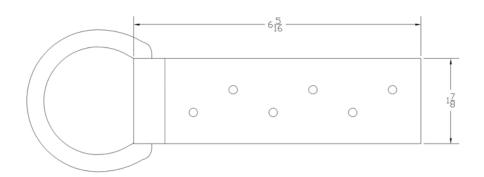

## **DESCRIPTION**

The Single D Roof Lock anchor is designed to be installed underneath a shingle and left in place for permanent roof fall arrest. Simply lift a roof shingle and screw the anchor into a rafter or truss using 6 #12 x 3-1/4" "Roof Grip" screws. Not designed for horizontal lifelines, this is a single point attachment anchor with the load intended to be applied in the long axis of the anchor.

## **GENERAL SPECIFICATIONS**

tem Description Tested At

Plate .040" 304 Stainless Steel N/A

D-Rings Zinc Plated Forged Steel 5,000 lb

Capacity—1 worker, max weight 310lbs including tools and equipment Break Strength—Min 5,000 lbs.

Weight—1 lbs

Technical References: Meets OSHA 1926 Subpart M, ANSI Z359-2007